

## MOONS CHANDELIER

---

The Moons chandelier is a contemporary light fixture. It is ideal to be installed in large scale spaces but can also fit in much smaller spaces in it's smaller version. The lampshades are adjustable and, by opening and closing a small clip, can be tilted in different positions.

---

**Category** Pendant lamp

**Materials** Aluminum, metal and acrylic

**Dimensions** Width: 100 cm / 37.4 in  
Height: 40 cm / 15.7 in  
Length: 240 cm / 94.5 in



40 cm / 15.7 in


**Color/Finish** Matt black

240 cm / 94.5 in

**Light source** 10W LED X7

**Voltage** 120V / 240V

**Weight** ~ 15 Kg

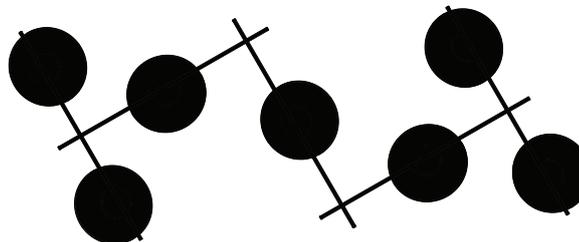

100 cm / 37.4 in

**Cable** Black PVC  
Drop length 2 meters

\* If you wish to specify drop length please tell us at the time of the order.

### Cleaning instructions

---


Before cleaning, light must be turned off and unplugged from the main electricity. While cleaning the lamp please take extra care not to use force on the fitting. Use a soft and dry dust cloth and gently go over the product.

# INSTALLATION

---

Inside you will find a sketch with ceiling locations for the metal hooks (supplied as well inside the box)

You can attached this sketch to the ceiling and mark the points where you need to drill.

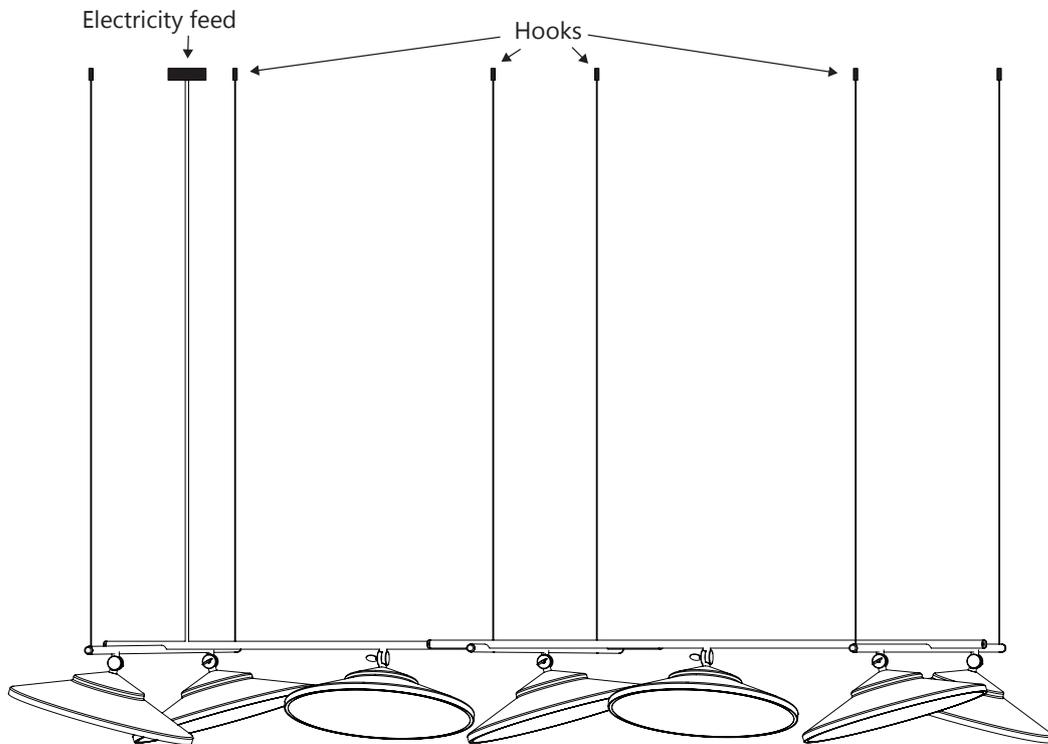


## HOW TO CONNECT THE HOOKS

---


1.

Attach the hook base (**A**) to the ceiling



2.

Insert the steel wires (supplied inserted to the chandelier body) to the hook connector (**B**) and screw it to the hook base. Now you can adjust the wanted drop length of the lamp.

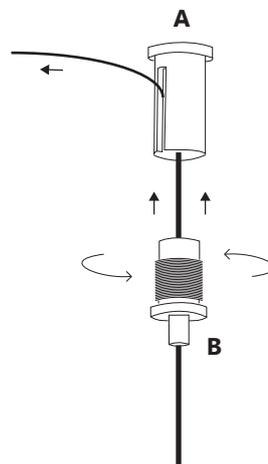


## HOW TO INSTALL THE CEILING ROSE

---


1.

Before attaching the ceiling rose: unscrew the small plastic screw at the bottom of the ceiling rose (**A**) and choose the wanted drop length for the lamp. When ready screw back the plastic screw in order to secure the electricity cable.

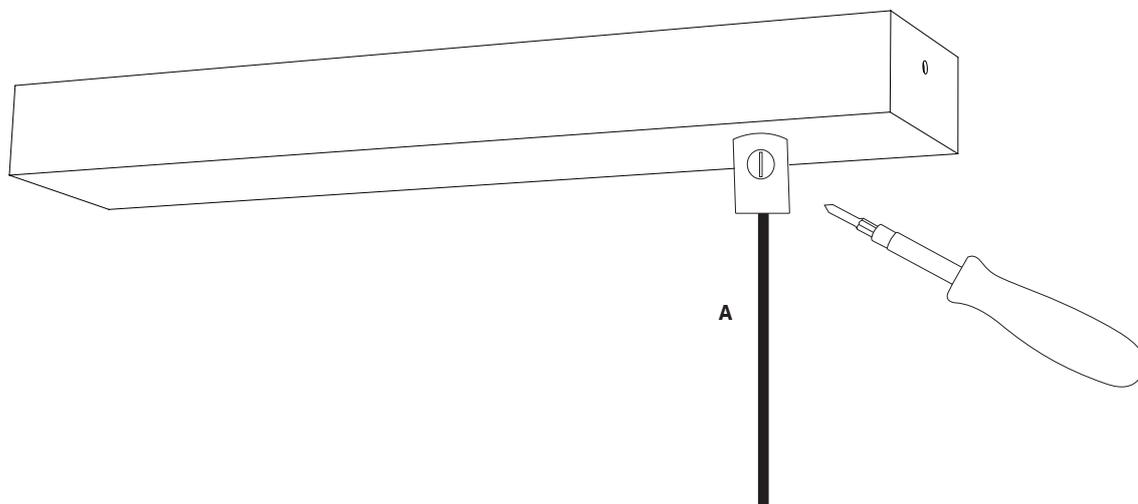

2.


Disassemble the ceiling rose. Connect the metal bridge to the ceiling (**B**) connect the electricity wires from the lamp cable to the driver (- +) (**C**) and from the ceiling to the junction box (**D**) and secure the ceiling rose to the metal bridge with the 2 small screws (**E**)

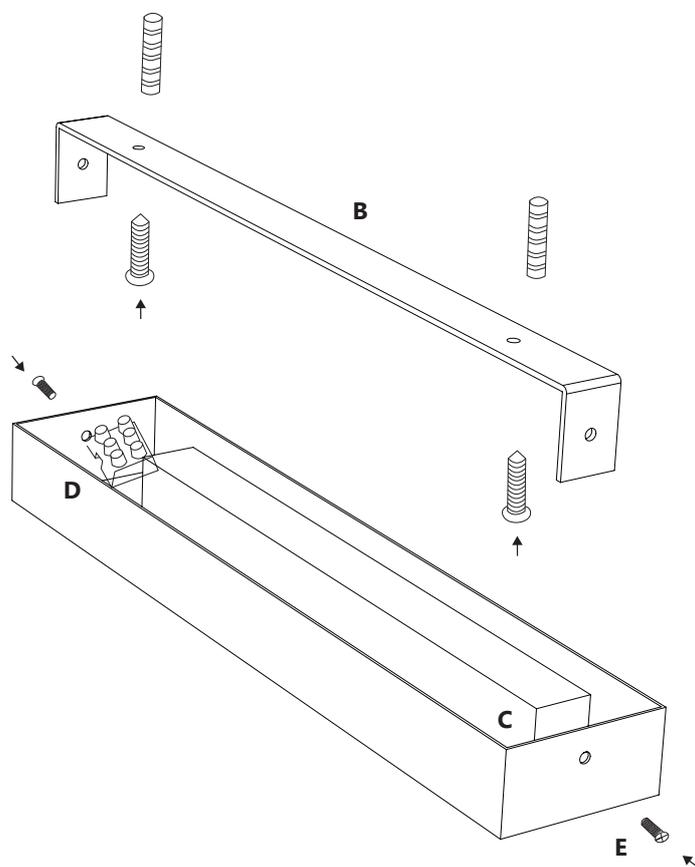

## HOW TO CONNECT THE ELECTRICITY

---

Please connect the wires coming from the ceiling to the triple junction box on one side of the driver (**A**) and the wire coming from the lamp to the double junction box to the + (plus) and - (minus) slots at the other side of the driver (**B**)

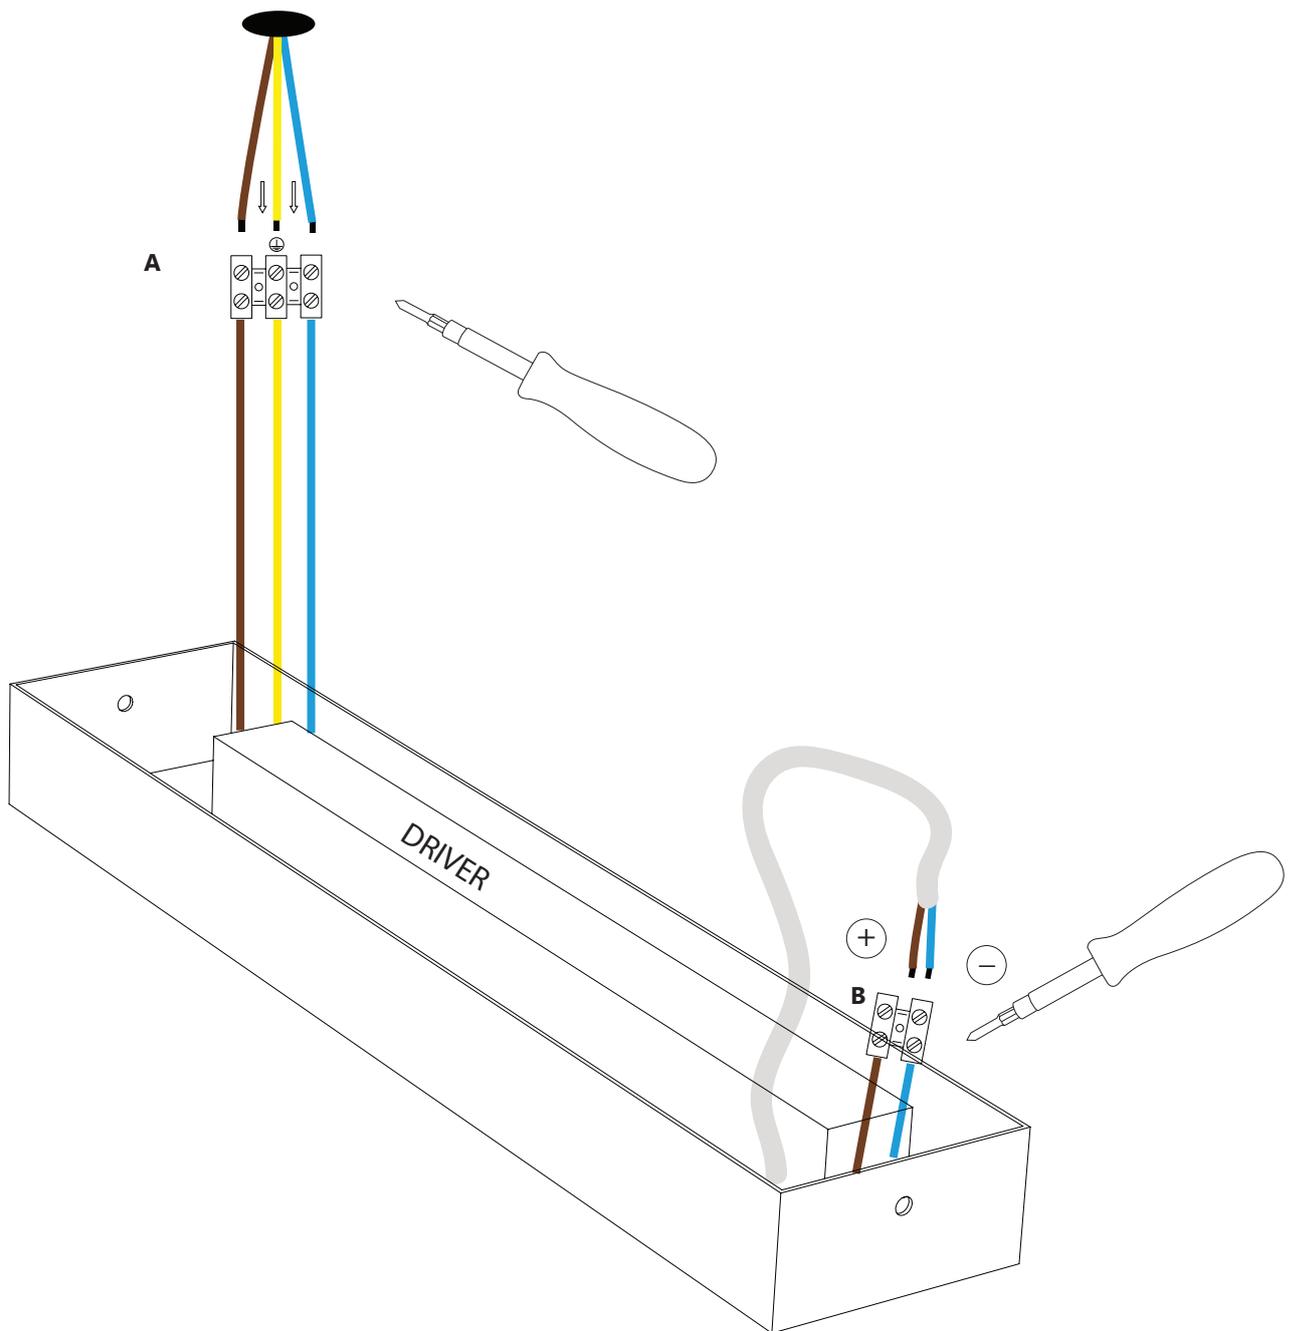


## HOW TO REPOSITION THE LAMPSHADE

---

Before repositioning the lampshade light must be turned off and unplugged from the main electricity


1.

Before adjusting the lampshade position please support the lampshade with your hand on its side.  
Now open slightly - **not more than half a round!** - the metal clip.

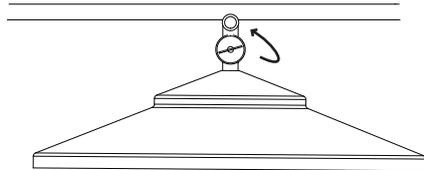

2.

Reposition the lampshade in one of the 2 directions possible: left and right.

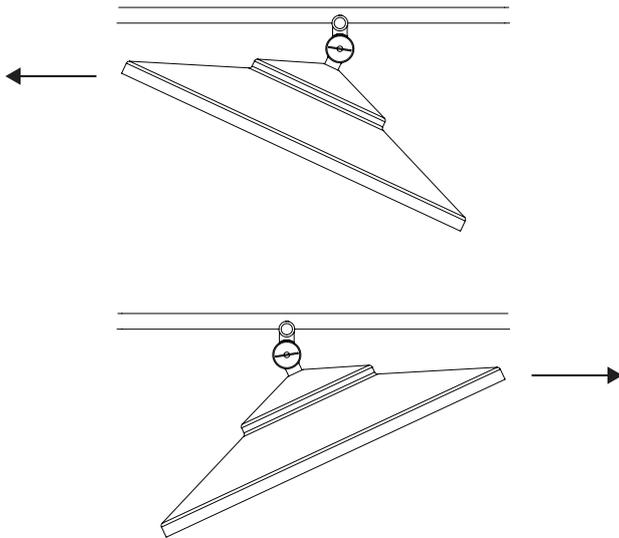

3.

After you are happy with the new positioning – please close the metal clip in order to secure the lampshade in its new angle.

