


## BELLS PENDANT LAMP X2

---

In its suspended version a thin steel wire, almost invisible, is holding the lamp in place and tilting it slightly on its side. The lamp can be fixed anywhere in space while the pvc electrical cable, running to the electricity source, adding to the overall aesthetics of the installed lamp.

---

<b>Category</b>	Pendant lamp
<b>Materials</b>	Metal
<b>Dimensions</b>	Width: 30 cm / 11.8 in Height: 70 cm / 27.5 in Length: 10 cm / 3.9 in
<b>Color/Finish</b>	Matt black - Brushed brass
<b>Light source</b>	E27 LED 7W X 2
<b>Voltage</b>	120V / 240V
<b>Weight</b>	~ 2 Kg
<b>Cable</b>	Black PVC Drop length 200 cm

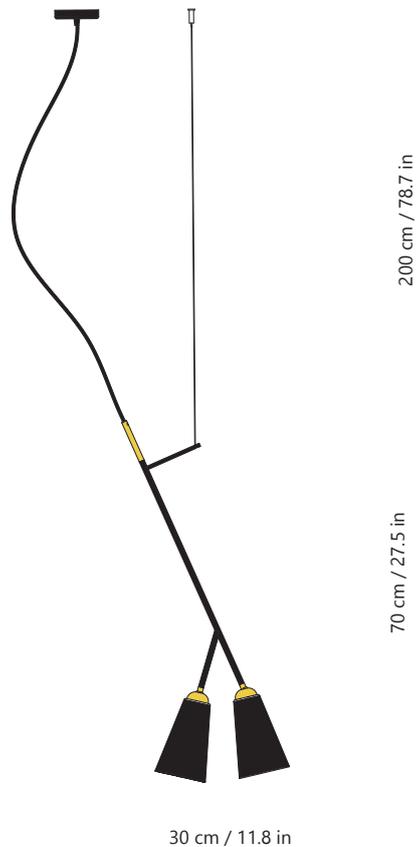

\* If you wish to specify drop length please tell us at the time of the order.


### Cleaning instructions

---

Before cleaning, light must be turned off and unplugged from the main electricity. Whilst cleaning the lamp please take extra care not to use force on the fitting. Use a soft and dry dust cloth and gently go over the product.

# INSTALLATION

---

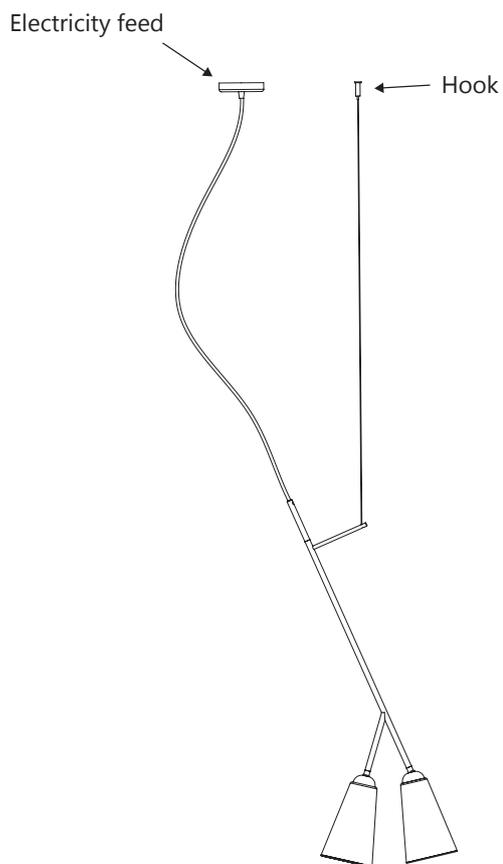


## HOW TO CONNECT THE HOOK

---


1.

Attach the hook base (**A**) to the ceiling

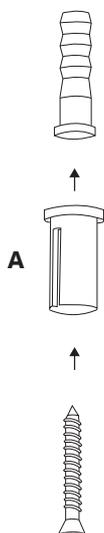

2.

Insert the steel wires (already inserted in the chandelier body) to the hook connector (**B**) and screw it back into the hook base. Now you can adjust the wanted drop length of the lamp.

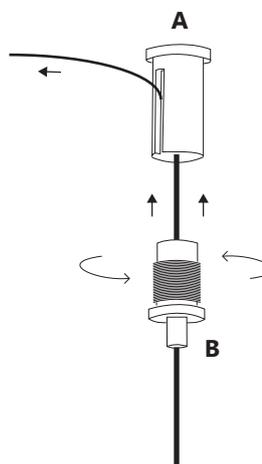


# HOW TO INSTALL THE CEILING ROSE

---


1.

Before attaching the ceiling rose: unscrew the small plastic screw at the bottom of the ceiling rose (**A**) and choose the wanted drop length for the lamp. When ready screw back the plastic screw in order to secure the electricity cable.

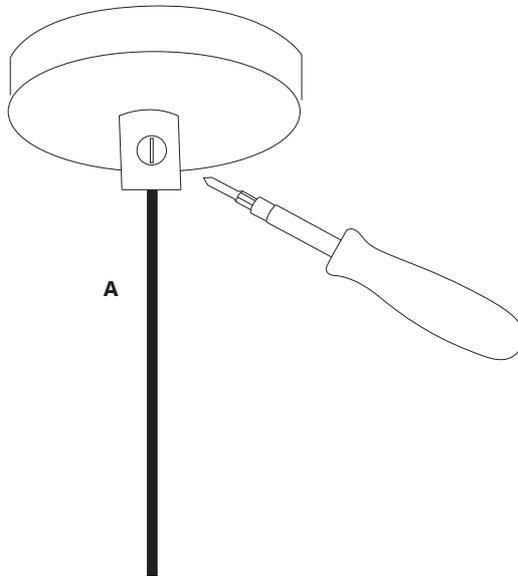

2.

Disassemble the ceiling rose. Connect the metal bridge to the ceiling (**D**) connect the electricity wires from the cable and from the ceiling to the junction box (**E**) and secure the ceiling rose to the metal bridge with the 2 small screws (**F**)

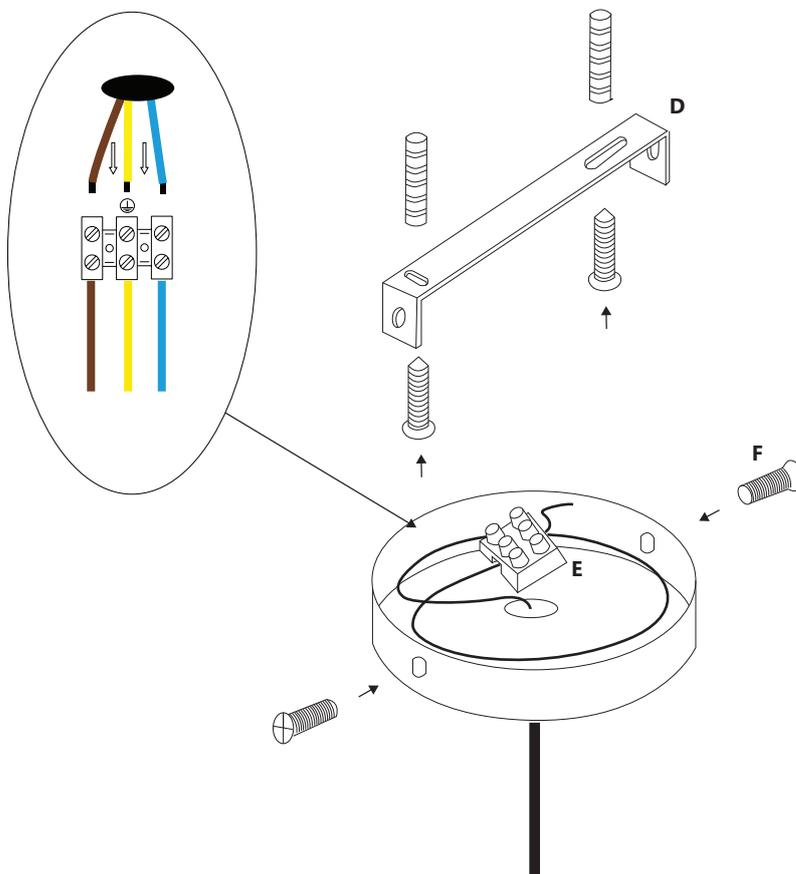


## HOW TO REPOSITION THE LAMPSHADE

---

Before repositioning the lampshade light must be turned off and unplugged from the main electricity

1.

The lampshades can be repositioned by pushing them slightly to the sides.

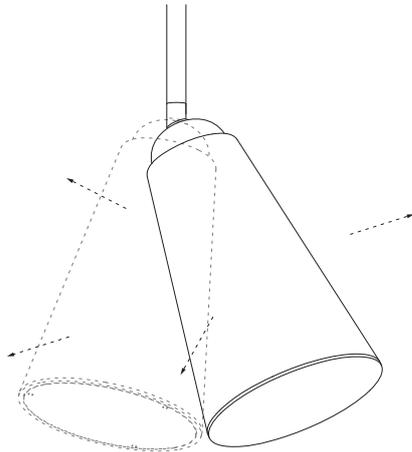

## HOW TO REPLACE A LIGHT BULB

---

Before changing a bulb light must be turned off and unplugged from the main electricity

1.

Unscrew the old E27 bulb and screw back the new one.

