

NORD PENDANT LAMP

This minimalist collection makes a striking architectural statement through the precise intersection of pure geometric forms. A slender black rod decisively bisects the clean, expansive plane, creating a sense of weightless balance that appears to glide effortlessly through the air.

Designed to anchor high-end modern interiors with a quiet, Scandinavian-inspired sophistication, the fixture thoughtfully conceals its light source to cast a warm, soft glow, beautifully illuminating the space while maintaining its stark, sculptural silhouette

Category Pendant lamp

Materials Metal

Dimensions width: 4 cm / 1.5 in
height: 15 cm / 5.9 in
length: 200 cm / 78.7 in


Color/Finish Matt

Light source 20W LED

Voltage 120V / 240V

Weight ~ 4 Kg

Cable Clear PVC Cable
Drop length 2 meters

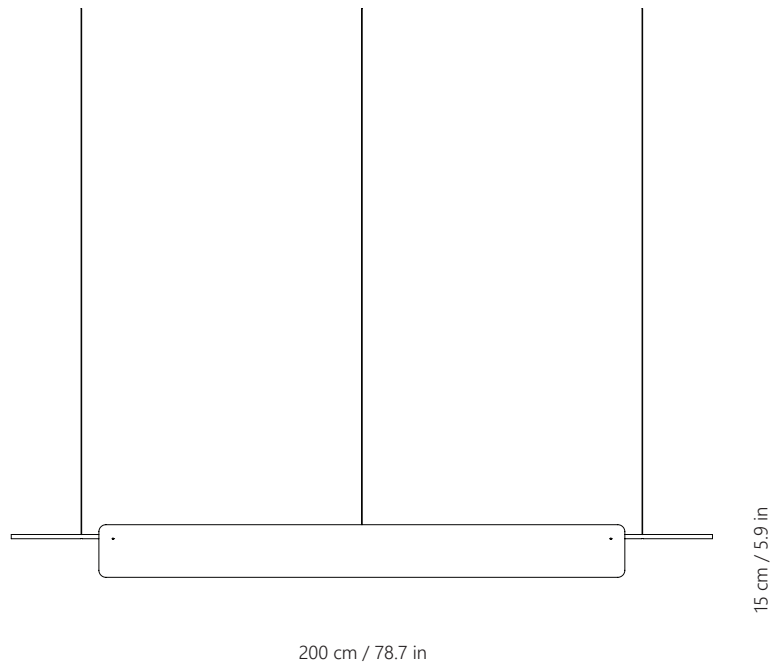


* If you wish to specify drop length please tell us at the time of the order.

Cleaning instructions

Before cleaning, light must be turned off and unplugged from the main electricity.
While cleaning the lamp please take extra care not to use force on the fitting.
Use a soft and dry dust cloth and gently go over the product.

INSTALLATION


Secure the steel wire hooks to the ceiling according to the measurements below and hang the pendant lamp. Once secured you can set the location of the electricity feed in any spot in between the 2 small screws at the front of the pendant lamp (the 142 cm gap)

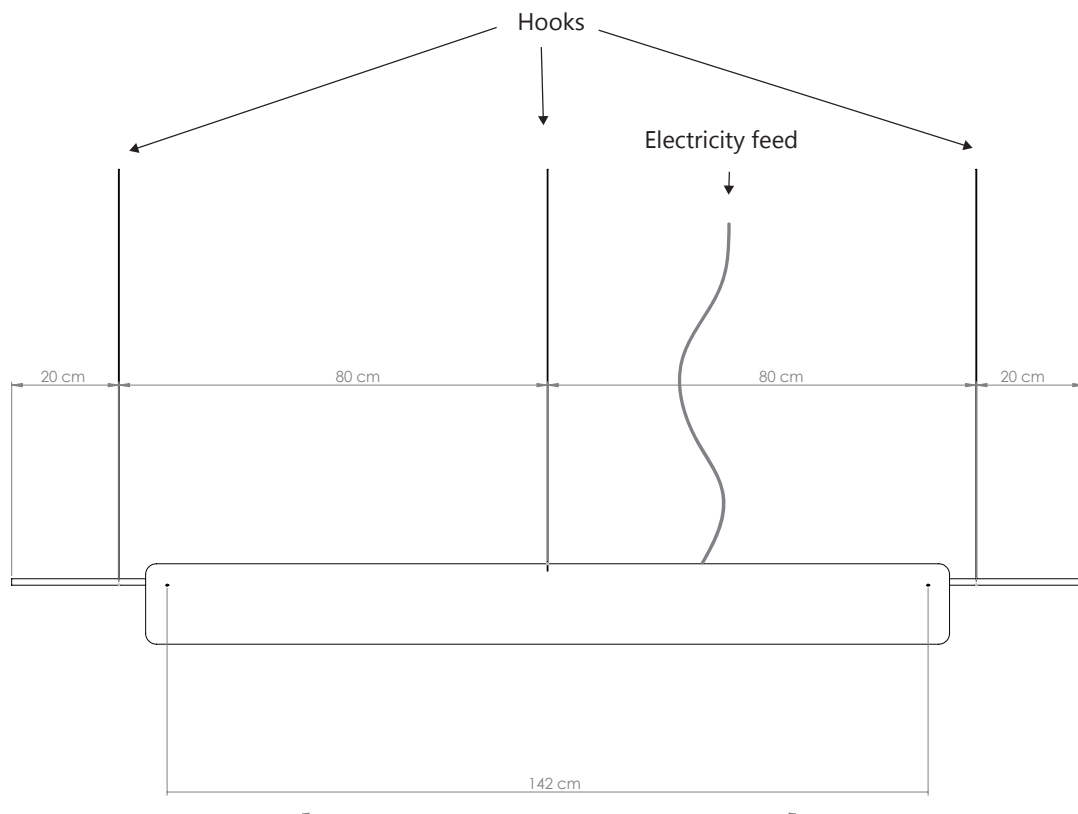

HOW TO CONNECT THE HOOKS


1.

Attach the hook base (**A**) to the ceiling

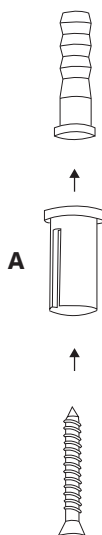

2.


Inset the steel wires (supplied inserted to the chandelier body) to the hook connector (**B**) and screw it to the hook base. Now you can adjust the wanted drop length of the lamp.

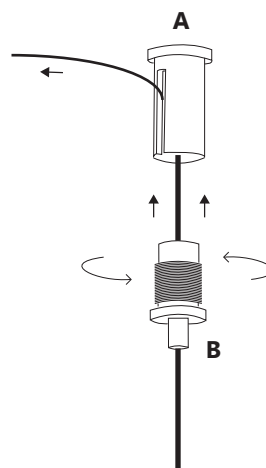

HOW TO INSTALL THE CEILING ROSE


1.

Before attaching the ceiling rose: unscrew the small plastic screw at the bottom of the ceiling rose (**A**) and choose the wanted drop length for the lamp. When ready screw back the plastic screw in order to secure the electricity cable.

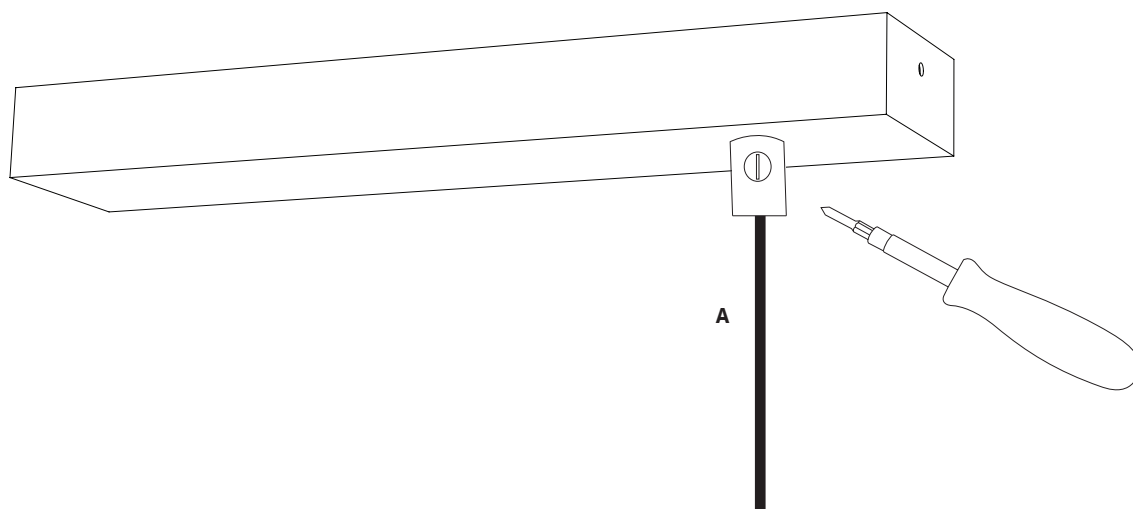

2.

Disassemble the ceiling rose. Connect the metal bridge to the ceiling (**B**) connect the electricity wires from the lamp cable to the driver (- +) (**C**) and from the ceiling to the junction box (**D**) and secure the ceiling rose to the metal bridge with the 2 small screws (**E**)

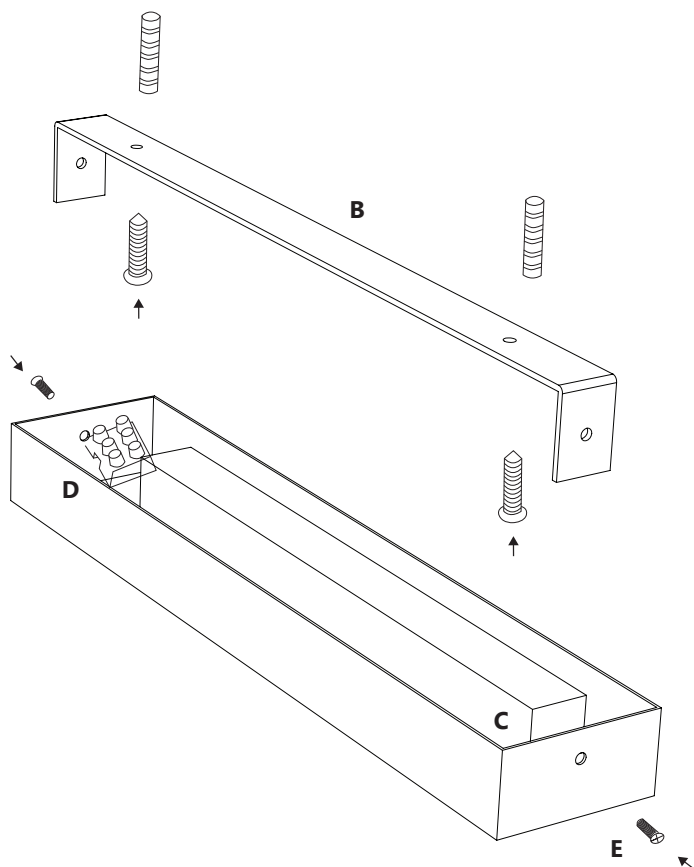

HOW TO CONNECT THE ELECTRICITY

Please connect the wires coming from the ceiling to the triple junction box on one side of the driver (**A**) and the wire coming from the lamp to the double junction box to the + (plus) and - (minus) slots at the other side of the driver (**B**)

