


## ECHO SINGLE PENDANT

---

Whether in copper or any other color, Jupiter single pendant can fit beautifully in any interior, filling the space with an elegant and radiant style.

---

<b>Category</b>	Pendant lamp
<b>Materials</b>	Metal
<b>Dimensions</b>	Dim: 40 cm / 15.7 in Height: 40 cm / 15.7 in
<b>Finish</b>	Matt
<b>Light source</b>	GU10 LED 7w max X 2
<b>Voltage</b>	120V / 240V
<b>Dimmable</b>	Possible
<b>Weight</b>	~ 2 Kg
<b>Cable</b>	Black PVC Drop length 2 meter

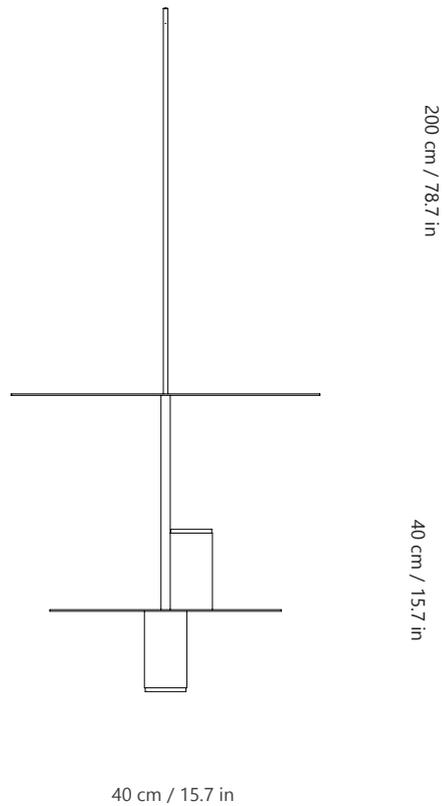

\* If you wish to specify drop length please tell us at the time of the order.

### Cleaning instructions

---


Before cleaning, light must be turned off and unplugged from the main electricity. Whilst cleaning the lamp please take extra care not to use force on the fitting. Use a soft and dry dust cloth and gently go over the product.

# INSTALLATION

---


1.

Before attaching the ceiling rose: unscrew the small plastic screw at the bottom of the ceiling rose (**A**) and choose the wanted drop length for the lamp. When ready screw back the plastic screw in order to secure the electricity cable.

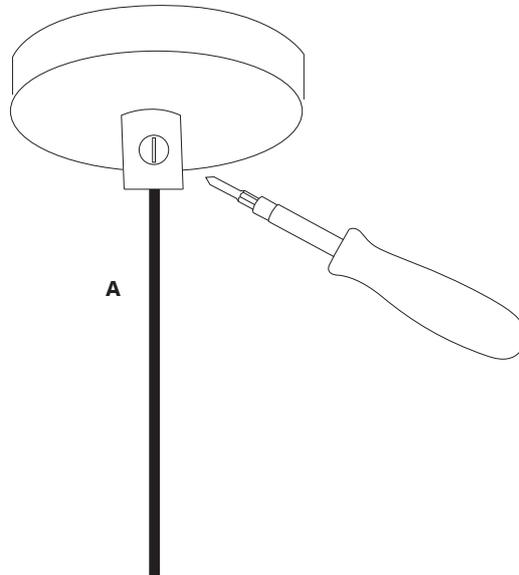

2.

Disassemble the ceiling rose. Connect the metal bridge to the ceiling (**B**) connect the electricity wires from the cable and from the ceiling to the junction box (**C**) and secure the ceiling rose to the metal bridge with the 2 small screws (**D**)

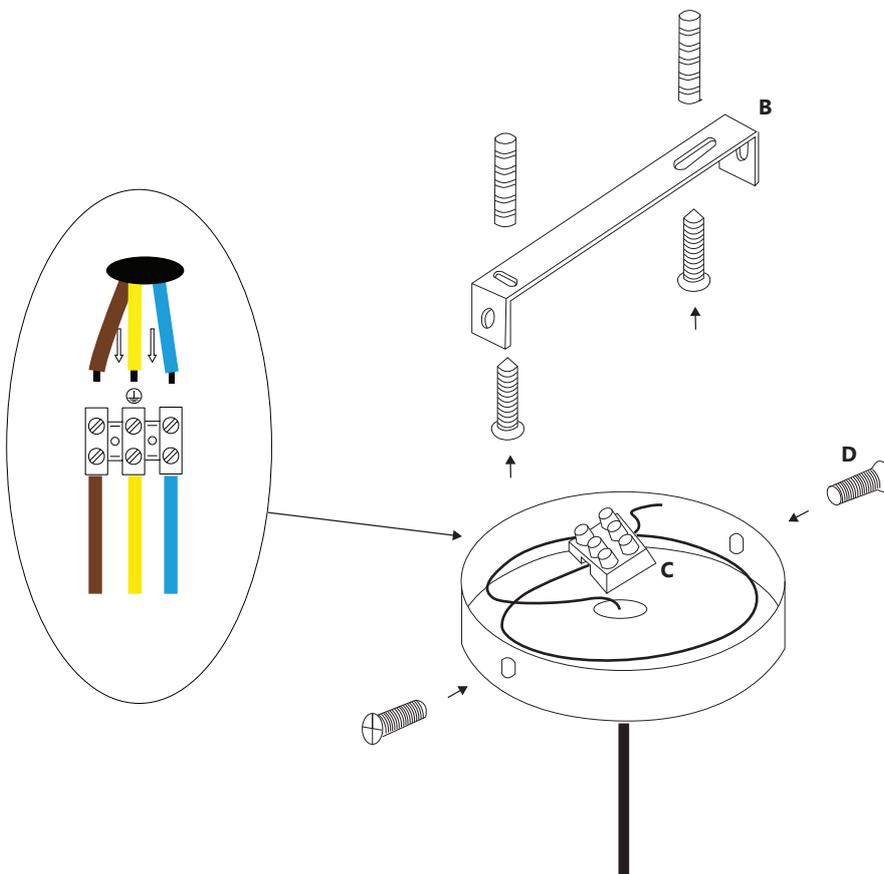


# HOW TO REPLACE A LIGHT BULB

---

Before changing a bulb light must be turned off and unplugged from the main electricity


1.

Unscrew the small metal ring at the bottom of the metal tube.

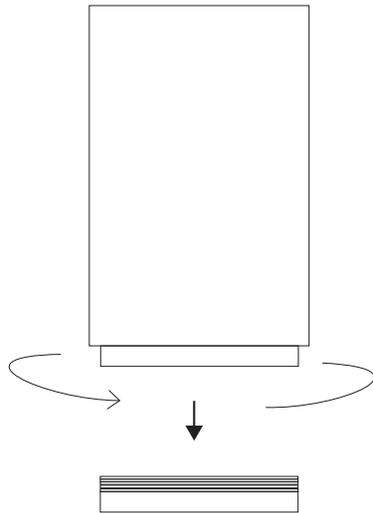

2.

Inside the metal tube there is a GU10 bulb holder. Pin the GU10 bulb to the bulb holder.

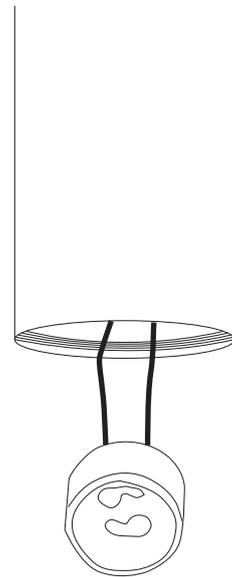

3.

Now screw the metal ring back to hold the light bulb inside.

