

MOBILE SYSTEM PENDANT LAMP X4

Drawing inspiration from the delicate equilibrium of kinetic mobiles, this architectural pendant fixture explores the tension between gravity and weightlessness. Merging rigorous geometry with a quiet, sculptural presence, this piece serves as a sophisticated focal point for modern interiors.

Category Pendant lamp

Materials Metal

Dimensions Length: 50 cm / 19.6 in
Height: 30 cm / 11.8 in
Width: 50 cm / 19.6 in

Finish Matt


Light source GU4 7W LED **12V**

Voltage 120V / 240V

Dimmable No

Weight ~ 3 Kg

Cable Black PVC
Drop length 2 meter

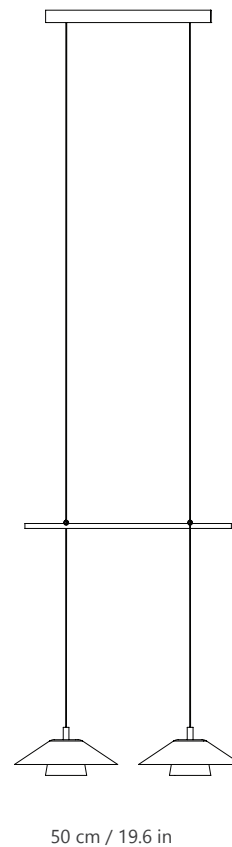

30 cm / 11.8 in

50 cm / 19.6 in

* If you wish to specify drop length please tell us at the time of the order.


Cleaning instructions

Before cleaning, light must be turned off and unplugged from the main electricity. Whilst cleaning the lamp please take extra care not to use force on the fitting. Use a soft and dry dust cloth and gently go over the product.

HOW TO INSTALL THE CEILING ROSE


1.

Disassemble the ceiling rose. Connect the metal bridge to the ceiling (**B**) connect the electricity wires from the lamp cable to the driver (- +) (**C**) and from the ceiling to the junction box (**D**) and secure the ceiling rose to the metal bridge with the 2 small screws (**E**)

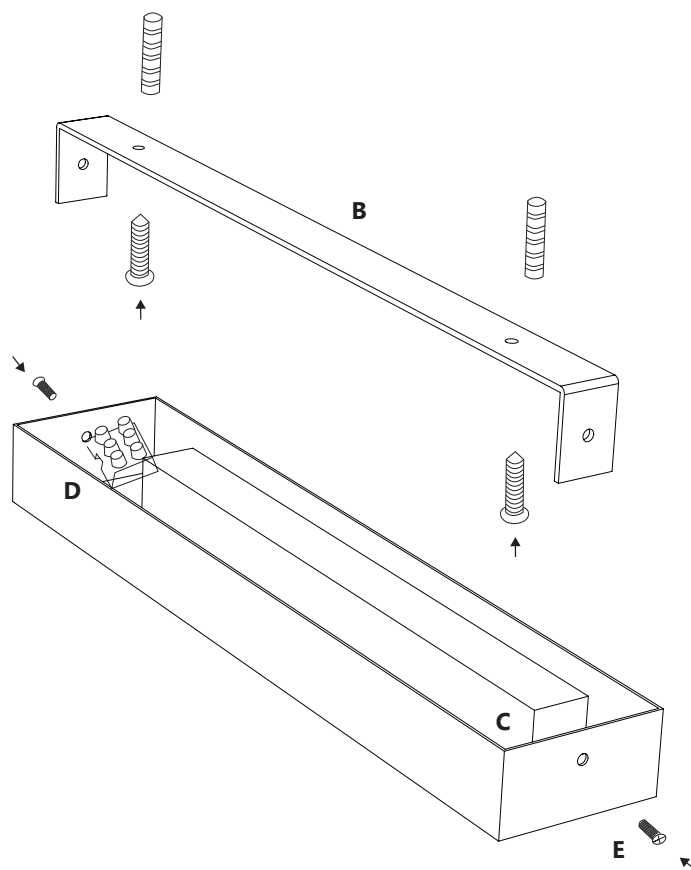


2.

Before attaching the ceiling rose: unscrew the small plastic screw at the bottom of the ceiling rose (**A**) and choose the wanted drop length for the lamp. When ready screw back the plastic screw in order to secure the electricity cable.

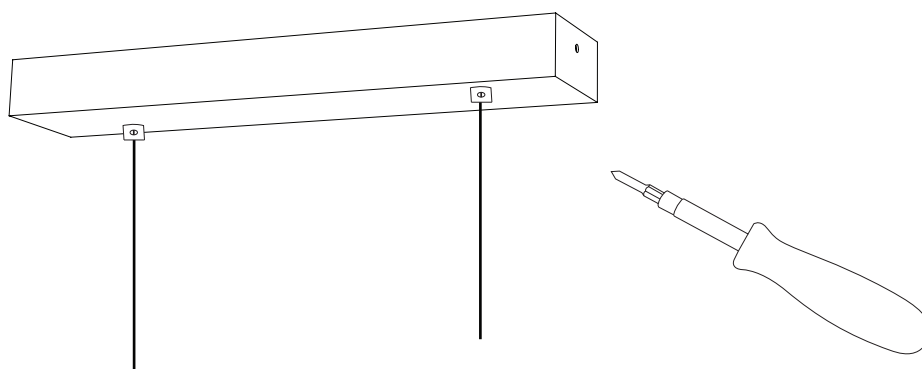


HOW TO CONNECT THE ELECTRICITY

Please connect the wires coming from the ceiling to the triple junction box on one side of the driver (**A**) and the wire coming from the lamp to the double junction box to the + (plus) and - (minus) slots at the other side of the driver (**B**)

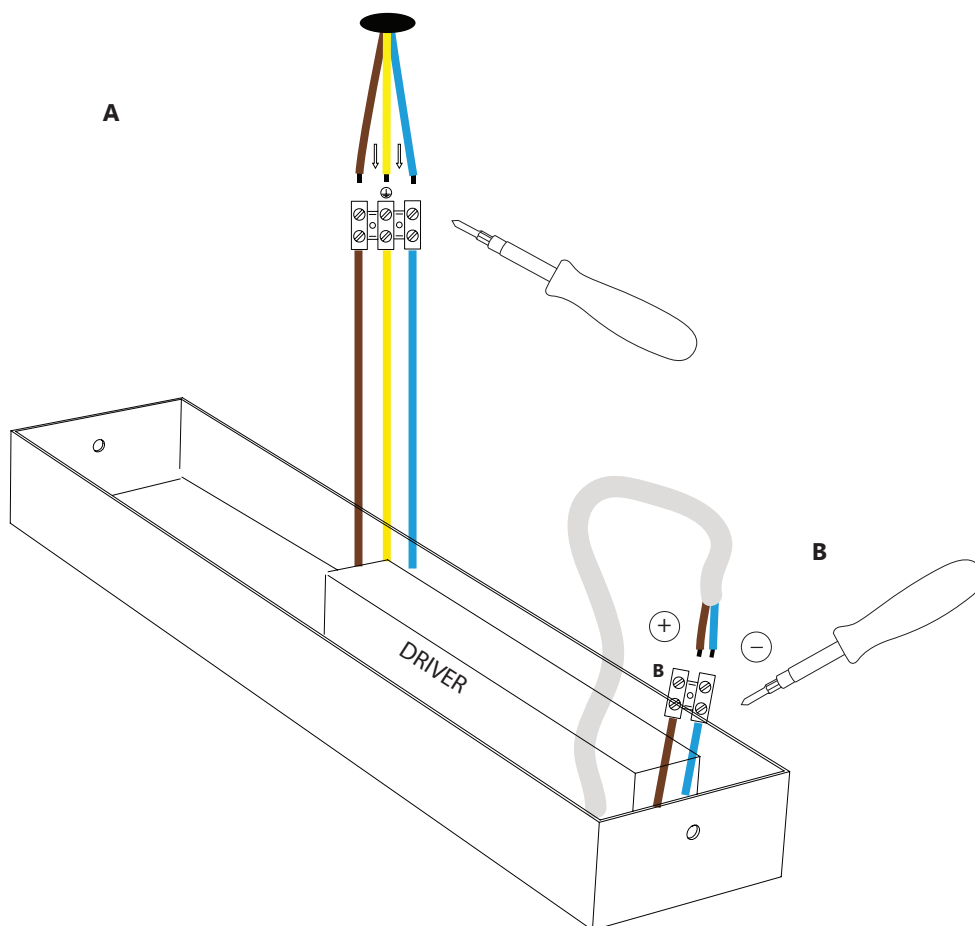

HOW TO REPLACE A LIGHT BULB

Inside the metal shade there is a GU4 bulb holder.
Pin the GU4 bulb to the bulb holder.

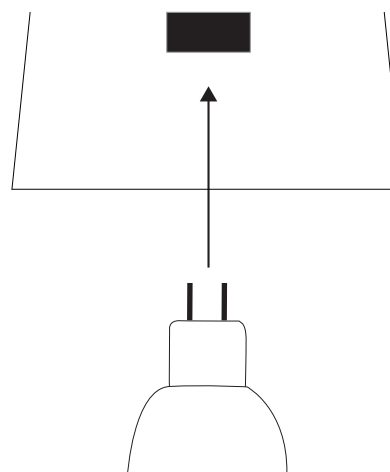

INSTALLATION ON PLASTERED CEILING

Please find below the location of the 4 feeds of the pendant lamp.

